SOAP DISPENSER

VERTICAL, WALL MOUNTED STAINLESS STEEL AISI 304 WHITE EPOXY

Code: DJ0040

General Description

Liquid soap dispenser made of stainless steel AISI 304, white epoxy finish, wall mounted.
Push-button operated.
Robust and vandal-resistant.
Suitable for high traffic facilities.
Model suitable for public use.
It normally goes along with a warm air hand dryer.
Opening on top with provided mediclinics key that allows soap loading.
Vandal resistant locking cover.
Allows disinfectant solutions, liquid soaps or hydro-alcoholic gel. Surgical soaps and soaps with solid abrasive particles are not supported.



Components & Materials

Stainless steel AISI 304 body, 0,8mm thickness, white epoxy finish.
Stainless steel AISI 304 base plate, 0,8mm thickness, white epoxy finish.
Push button made of POM thermoplastic with stainless steel cover 0,8mm thickness.
It is mounted on the wall by means of 3 stainless steel screws with their corresponding Ø6mm wall plugs (the upper ones attach the dispenser whilst the lower one fix it to the wall) (screw and wall plugs are provided).
Inner tank made of 2,5mm thickness translucent PP. Access to its interior using a standard mediclinics key supplied.
Inner tank lid made of 2 mm thickness translucent PE-LD.
Black ABS plastic, anti-dripping and anti-corrosion valve.
Housing with one viewing slot.

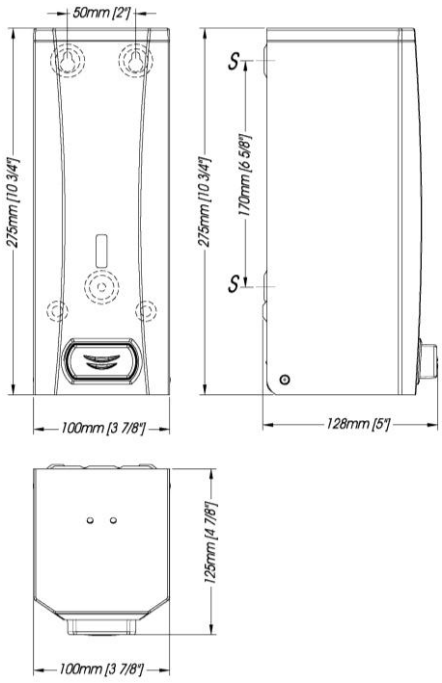

Dim ± 4%

Technical Specifications

Dimensions	*275x100x128mm*	**Capacity**	*1,5 L*
Weight (empty dispenser)	*1,2 Kg.*	**Liquid soaps allowed**	*Neutral PH Disinfectant*
Recommended installation height	*15-20 cm from shelf*	**Quantity dispensed per pulsation**	*0,8 ml*
Push-button	*Stainless steel*	**Operable force**	*25 N*

Operation

Press push-button manually to dispense a measured amount of liquid soap. Valve is operable with one hand.

Certificates & Qualifications

ISO 9001:2008.

Specification

Wall mounted soap dispenser, robust and vandal-resistant with a body made of stainless steel AISI 304, 0,8mm thickness, white epoxy coated. Base plate made of stainless steel AISI 304, 0,8mm thickness, white epoxy coated. Push-button made of POM with stainless steel cover 0,8mm thickness. It should be mounted on the wall by means of 3 stainless steel screw with their corresponding Ø6mm wall plugs, screws and wall plugs provided; the upper ones attach the dispenser, whilst the lower one fixes it to the wall. The dispenser should include an anti-dripping and anti-corrosion valve. The container should be 2,5mm thick, translucent PP with a 2mm thickness lid made of translucent PE-LD and the access to its interior should be using a standard mediclinics key supplied. The dispenser should be provided with one viewing slot. The soap dispenser should be suitable for disinfectant solutions, liquid soaps or hydro-alcoholic gel. Surgical soaps and soaps with solid abrasive particles are not supported. Overall dimensions shall be 275x100x128 mm.
Liquid soap dispenser shall be model DJ0040, stainless steel AISI 304, white epoxy coated, manufactured by Mediclinics

Revision 04-2013.0EU