






T16





1


<140°F/60°C


FaST
Foam Scrubbing Technology


<70°F/21°C







FaST
Foam Scrubbing Technology



FaST-PAK



2

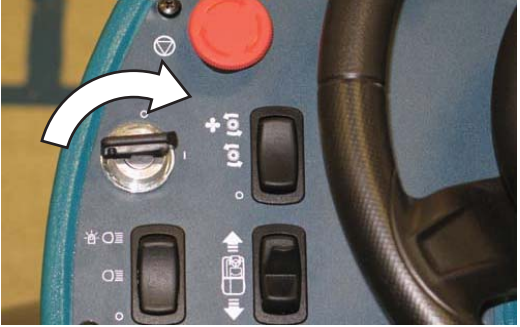

3




ec H₂O


FaST
Foam Scrubbing Technology


ES

4





5


















1








2









3



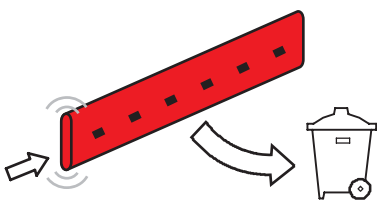

4








5



6



7





2 of 2

9009382 Rev. 01 (3-2012)

www.tennantco.com